WAAS	APP CRS	Rwy Idg	2502
CH 70501	279°	TDZE	108
W28A		Apt Elev	108

RNAV (GPS) RWY 28
BLOCK ISLAND STATE (BID)

DME/DME RNP-0.3 NA. If local altimeter setting not received, use Westerly State altimeter setting and increase all DAs/MDAs 40 feet. Baro-VNAV and VDP NA when using Westerly State altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 96°C (205°F).

MISSED APPROACH: Climb to 1500 direct CUGDA and via 287° track to SUFOK and hold.

AWOS-3	PROVIDENCE APP CON ★	CLNC DEL	UNICOM
134.775	125.75 319.2	120.1	123.0 (CTAF) L

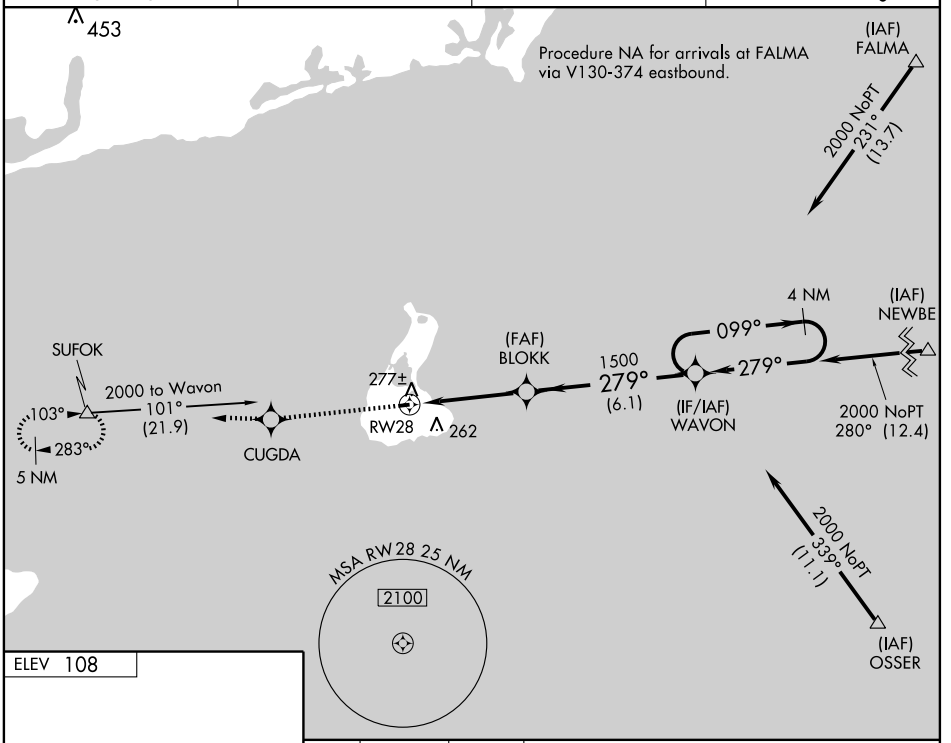



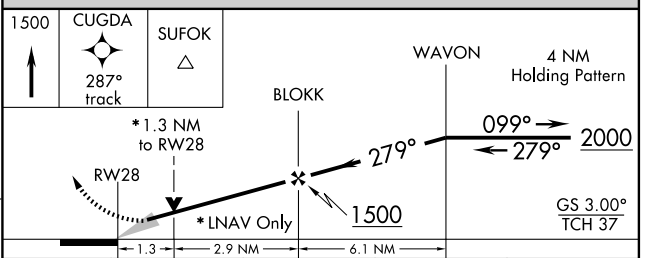

CATEGORY	A	B	C	D
LPV DA	358-1 250 (300-1)			NA
LNAV/VNAV DA	570-1¾ 462 (500-1¾)			NA
LNAV MDA	540-1 432 (500-1)		540-1¼ 432 (500-1¼)	NA
CIRCLING	580-1 472 (500-1)		580-1½ 472 (500-1½)	NA

NE-1, 22 OCT 2009 to 19 NOV 2009
NE-1, 22 OCT 2009 to 19 NOV 2009