# ILS or LOC RWY 15

ORLANDO/KISSIMMEE GATEWAY (ISM)

| LOC/DME I-ISM | APP CRS | Rwy Idg | 6000 |
|---|---|---|---|
| 109.75 | 153° | TDZE | 82 |
| Chan 34 (Y) | | Apt Elev | 82 |

T NA If local altimeter setting not received, use Orlando Intl altimeter setting and increase all DAs/MDAs 40 feet. VDP NA when using Orlando Intl altimeter setting.

MALSF

MISSED APPROACH: Climb to 600, then climbing right turn to 2200 via heading 240° and ORL VORTAC R-200 to TEMPE INT/ORL 28 DME and hold.

| AWOS-3 | ORLANDO APP CON | KISSIMMEE TOWER ★ | CLNC DEL | GND CON | UNICOM |
|---|---|---|---|---|---|
| 128.775 | 119.4 351.9 | 124.45 (CTAF) L | 121.7 119.95* *when twr closed | 121.7 | 122.95 |

RADAR REQUIRED

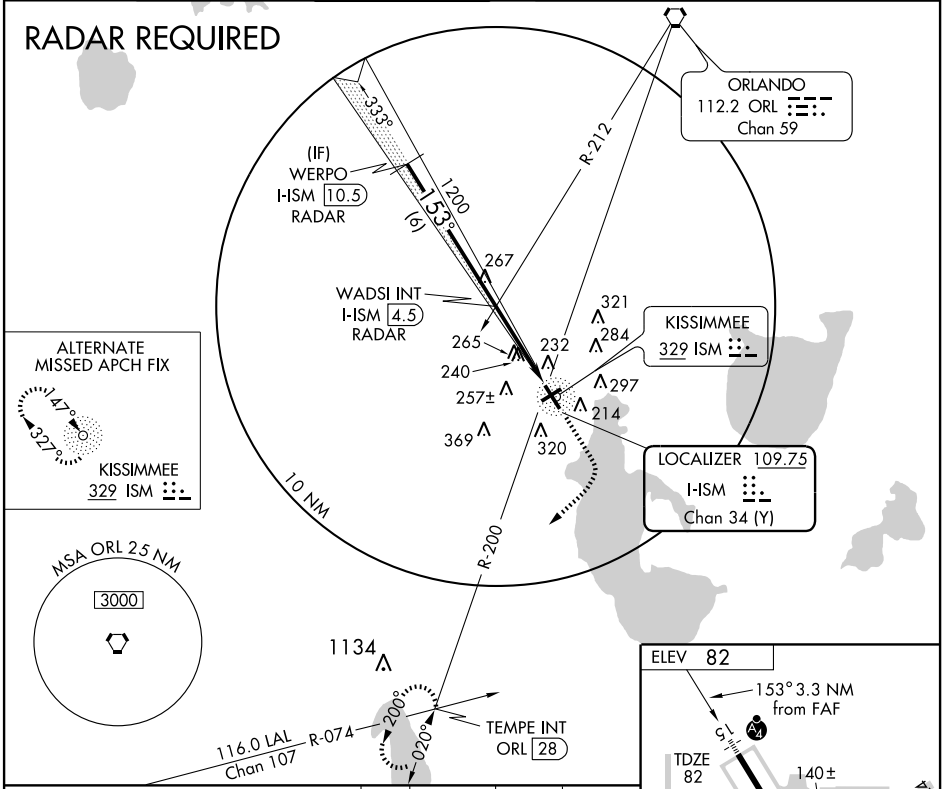


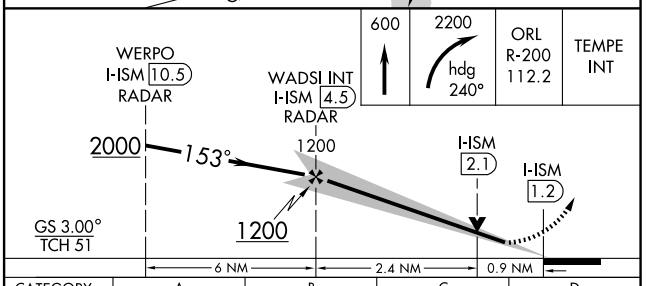


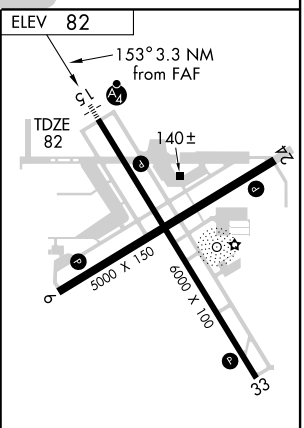


MIRL Rwys 15-33 and 6-24 L

| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-ILS 15 | 282-¾ 200 (200-¾) | | | |
| S-LOC 15 | 420-1 338 (400-1) | | | |
| CIRCLING | 680-1 598 (600-1) | | 680-1½ 598 (600-1½) | 680-2 598 (600-2) |

FAF to MAP 3.3 NM

| Knots | 60 | 90 | 120 | 150 | 180 |
|---|---|---|---|---|---|
| Min:Sec | 3:18 | 2:12 | 1:39 | 1:19 | 1:06 |



SE-3, 22 OCT 2009 to 19 NOV 2009
SE-3, 22 OCT 2009 to 19 NOV 2009