

RNAV (GPS) RWY 15



PLATTEVILLE MUNI (PVB)

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 42615 W15A | APP CRS 146° | Rwy Idg TDZE Apt Elev | 3999 1025 1025 |
|--|------------------------|-----------------------------|---|


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Dubuque altimeter setting and increase all DA 56 feet, all MDA 60 feet, increase LNAV/VNAV all Cats and LNAV Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Dubuque altimeter setting.

MISSED APPROACH:
Climb to 3000 direct ZAWDI and hold.

| | | |
|--------------------------|---------------------------------------|---------------------------------|
| AWOS-3 120.575 | CHICAGO CENTER 133.95 281.4 | UNICOM 122.7 (CTAF) 0 |
|--------------------------|---------------------------------------|---------------------------------|

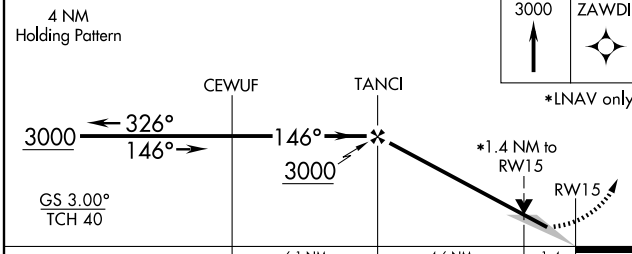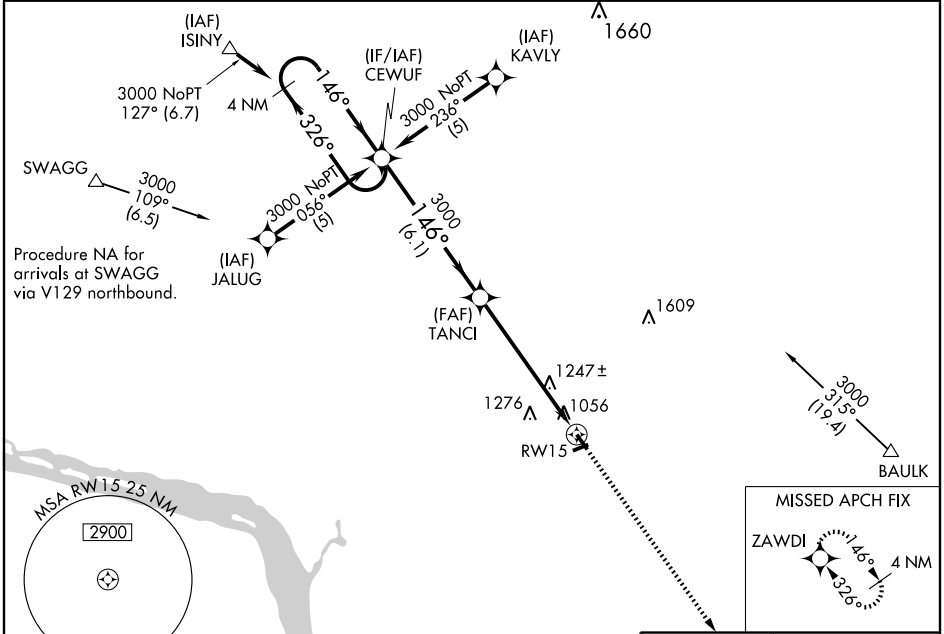

| CATEGORY | A | B | C | D |
|--------------|--------|--------------------|-------------------------|----|
| LPV DA | | 1275-1 250 (300-1) | | NA |
| LNAV/VNAV DA | | 1338-1 313 (400-1) | | NA |
| LNAV MDA | 1500-1 | 475 (500-1) | 1500-1½ 475 (500-1½) | NA |
| CIRCLING | 1500-1 | 475 (500-1) | 1500-1½ 475 (500-1½) | NA |

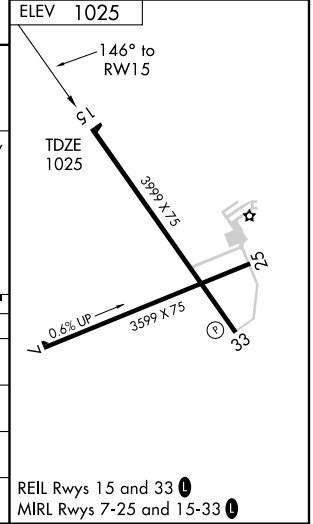

EC-3, 22 OCT 2009 to 19 NOV 2009

EC-3, 22 OCT 2009 to 19 NOV 2009