

ILS or LOC RWY 5

JACKSONVILLE/ALBERT J. ELLIS (O.A.J)


| | | | |
|---|------------------------|-----------------------------|---------------------------------------|
| LOC/DME I-OAJ 108.7 Chan 24 | APP CRS 052° | Rwy Idg TDZE Apt Elev | 7100 90 94 |
|---|------------------------|-----------------------------|---------------------------------------|

ADF REQUIRED. When local altimeter setting not received, use Wilmington altimeter setting and increase all DA/MDA 100 feet, increase S-ILS all Cats and S-LOC Cats C/D visibility 1/4 mile. VDP NA when using Wilmington altimeter setting.

MALSR
AS

MISSED APPROACH: Climb to 600 then climbing left turn to 2100 direct ELLAS LOM/I-OAJ 7.3 DME and hold.

| | | | |
|--------------------------|---|--------------------------|--|
| AWOS-3 124.475 | WILMINGTON APP CON* 135.75 257.6 346.35 | CLNC DEL 121.4 | UNICOM 123.0 (CTAF) 0 |
|--------------------------|---|--------------------------|--|

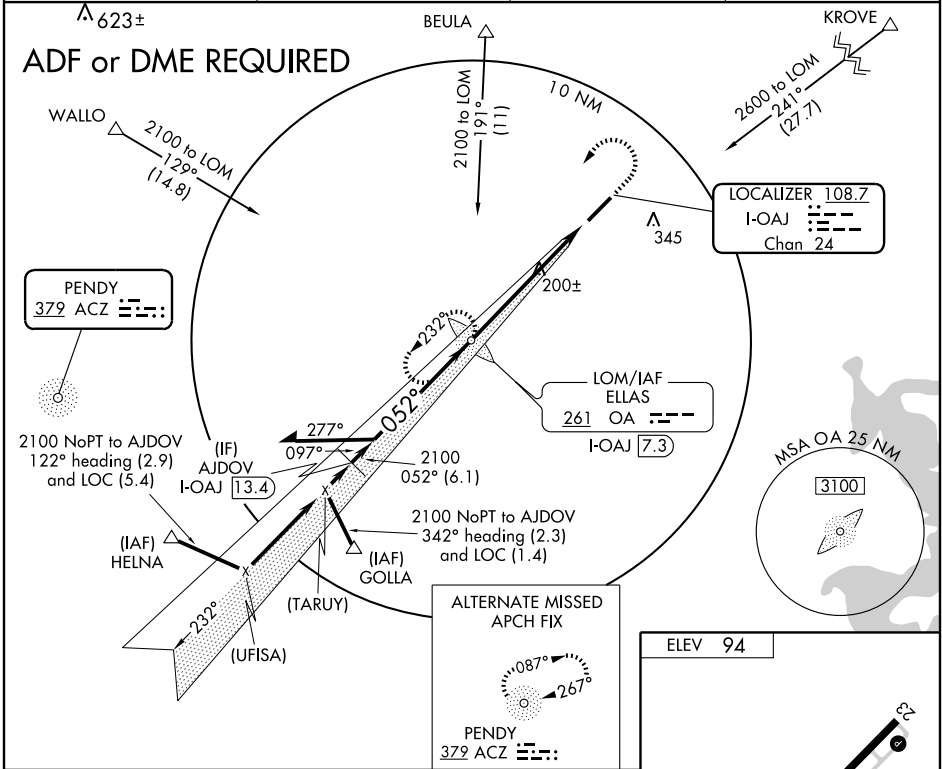

| | | | | |
|----------|----------------------|----------------------|------------------------------|--------------------------|
| CATEGORY | Remain within 10 NM | | | |
| | A | B | C | D |
| S-ILS 5 | | 290-1/2 | 200 (200-1/2) | |
| S-LOC 5 | | 460-1/2 | 370 (400-1/2) | 460-3/4 370 (400-3/4) |
| CIRCLING | 500-1 406 (500-1) | 560-1 466 (500-1) | 560-1 1/2 466 (500-1 1/2) | 660-2 566 (600-2) |

GS 3.00° TCH 55

2100 052°

2100 232°

2080

5 NM

1 NM

600


2100

OA 261

I-OAJ 2.3

I-OAJ 1.3

052° 6 NM from FAF

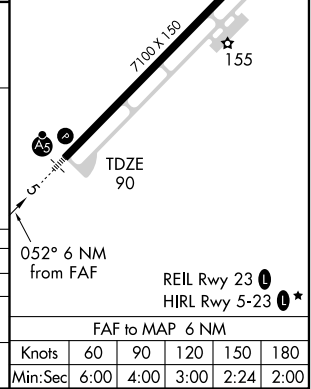

SE-2, 22 OCT 2009 to 19 NOV 2009

SE-2, 22 OCT 2009 to 19 NOV 2009