

RNAV (GPS) RWY 11


WINTER HAVEN'S GILBERT (GIF')

| | | | |
|---------------------------------|------------------------|---|-------------|
| WAAS CH 86502 W11A | APP CRS 107° | Rwy Idg TDZE 145 Apt Elev 145 | 4001 |
|---------------------------------|------------------------|---|-------------|

▼ Straight-in minimums NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 48°C (119°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. If local altimeter setting not received, use Bartow Muni altimeter setting and increase all DAs/MDAs 20 feet. Baro-VNAV NA when using Bartow Muni altimeter setting.



▲ MISSED APPROACH: Climb to 2600 direct RAVYO and hold.

| | | |
|------------------------|--------------------------------------|----------------------------------|
| ASOS 133.675 | TAMPA APP CON 120.65 290.3 | UNICOM 123.05 (CTAF) 0 |
|------------------------|--------------------------------------|----------------------------------|

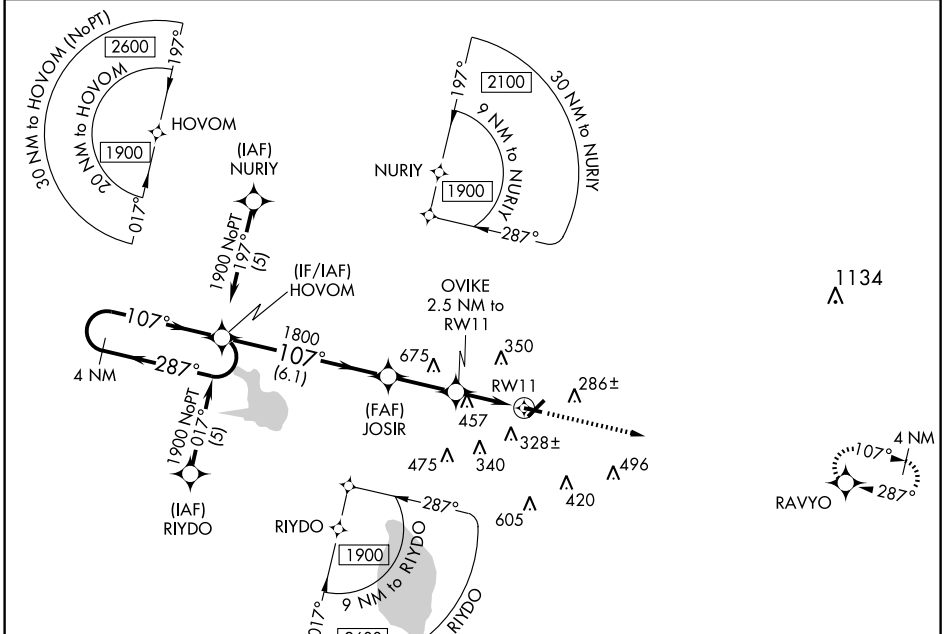

SE-3, 22 OCT 2009 to 19 NOV 2009

SE-3, 22 OCT 2009 to 19 NOV 2009

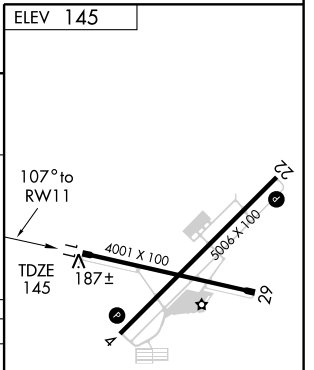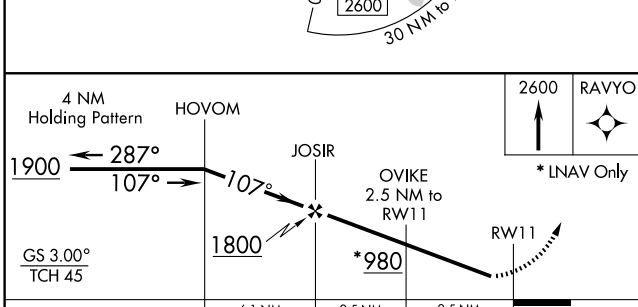

| CATEGORY | A | B | C | D |
|---------------|---------------------|---------------------|---------------------|---|
| LPV DA | 395-1 250 (300-1) | | | |
| LNAV/ VNAV DA | 647-1¾ 502 (600-1¾) | | | |
| LNAV MDA | 760-1 615 (700-1) | 760-1¾ 615 (700-1¾) | 760-2 615 (700-2) | |
| CIRCLING | 760-1¾ 615 (700-1¾) | | 820-2¼ 675 (700-2¼) | |

REIL Rwy 4 and 22
MIRL Rwy 4-22 0