RNAV (GPS) RWY 11

JESUP-WAYNE COUNTY (JES)

WAAS CH 77815 W11A	APP CRS 103°	Rwy Idg 5500 / TDZE 107 / Apt Elev 107

Baro-VNAV NA when using Savannah/Hilton Head Intl altimeter setting.
NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP -0.3 NA. When local altimeter setting not received, use Savannah/Hilton Head Intl altimeter setting and increase LPV DA to 583, LNAV/VNAV DA to 594, and all MDA 140 feet; increase LPV all Cats and LNAV Cat C visibility ½ mile and LNAV/VNAV Cats visibility ¼ mile. VDP NA when using Savannah/Hilton Head Intl altimeter setting.

MISSED APPROACH: Climb to 2700 direct EGOXY and right turn via track 217° to FEJYY and right turn via track 326° to KOGSE and hold.

AWOS-A	JACKSONVILLE CENTER	UNICOM
340.0	126.75 277.4	122.8 (CTAF) L

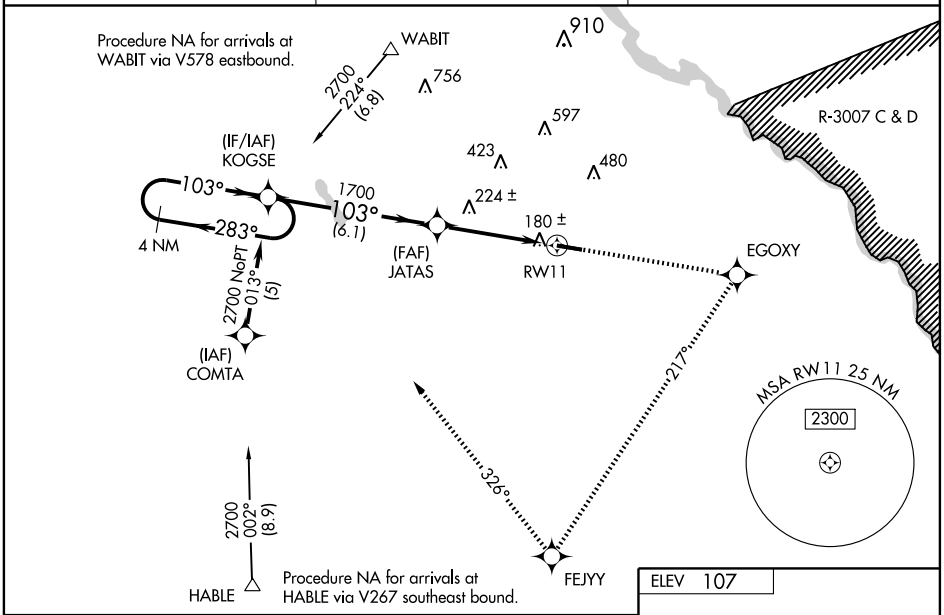

ELEV 107

VGSI and RNAV glidepath not coincident.

2700	EGOXY	trk 217°	FEJYY	trk 326°	KOGSE

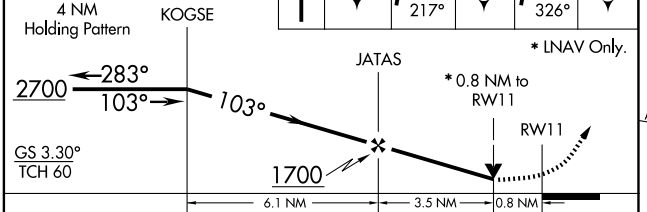

* LNAV Only.



CATEGORY	A	B	C	D
LPV DA	462-1 355 (400-1)			NA
LNAV/VNAV DA	473-1¼ 366 (400-1¼)			NA
LNAV MDA	480-1 373 (400-1)			NA
CIRCLING	500-1 393 (400-1)	560-1 453 (500-1)	560-1½ 453 (500-1½)	NA

MIRL Rwy 11-29 L

SE-4, 22 OCT 2009 to 19 NOV 2009
SE-4, 22 OCT 2009 to 19 NOV 2009