WAAS	APP CRS	Rwy Idg	5399
CH 53508	354°	TDZE	1984
W35A		Apt Elev	2013

RNAV (GPS) RWY 35

ELK CITY RGNL BUSINESS (ELK)

V
A NA — Baro-VNAV NA when using Clinton-Sherman altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Clinton-Sherman altimeter setting and increase all DA/MDA 40 feet, increase LNAV and circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 4000 direct EHOMO and hold.

AWOS-3	FORT WORTH CENTER	UNICOM
118.225	128.4 269.375	122.8 (CTAF) L

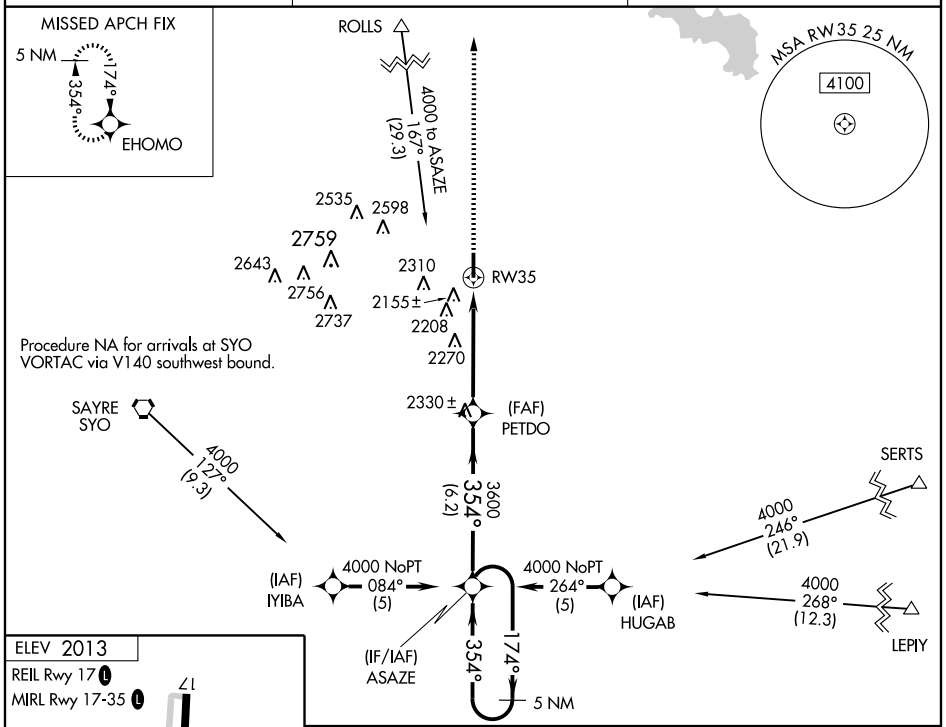

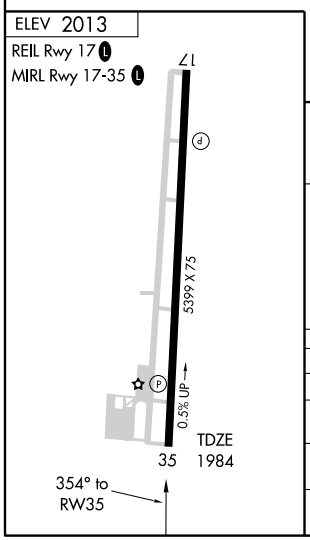

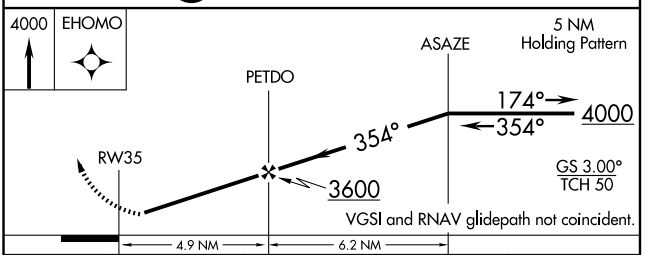

CATEGORY	A	B	C	D
LPV DA	2234-1 250 (300-1)			NA
LNAV/VNAV DA	2510-2 526 (500-2)			NA
LNAV MDA	2580-1 596 (600-1)		2580-1½ 596 (600-1½)	NA
CIRCLING	2580-1 567 (600-1)		2580-1½ 567 (600-1½)	NA

SC-1, 22 OCT 2009 to 19 NOV 2009

SC-1, 22 OCT 2009 to 19 NOV 2009