WAAS	APP CRS	Rwy Idg	5000
CH **90200**	**274°**	TDZE	**600**
W27A		Apt Elev	**601**

AL-6474 (FAA)

RNAV (GPS) RWY 27

SAGINAW COUNTY H. W. BROWNE (HYX)

When local altimeter setting not received, use Saginaw MBS Intl altimeter setting and increase all DA 36 feet. Increase LNAV/VNAV all Cats visibility ¼ , increase all MDA 40 feet. Baro-VNAV and VDP NA when using Saginaw MBS Intl altimeter setting. For uncompensated Baro-VNAV system. Procedure NA below -16°C (4°F) or above 54°C (130°F). For inoperative MALSR increase LPV visibility to 1 all Cats. DME/DME RNP-0.3 NA.

MALSR

MISSED APPROACH: Climb to 2800 direct CULAK and hold.

AWOS-3	SAGINAW APP CON ★	GCO	UNICOM
118.325	**120.95 235.625**	**121.725**	**122.8** (CTAF) L

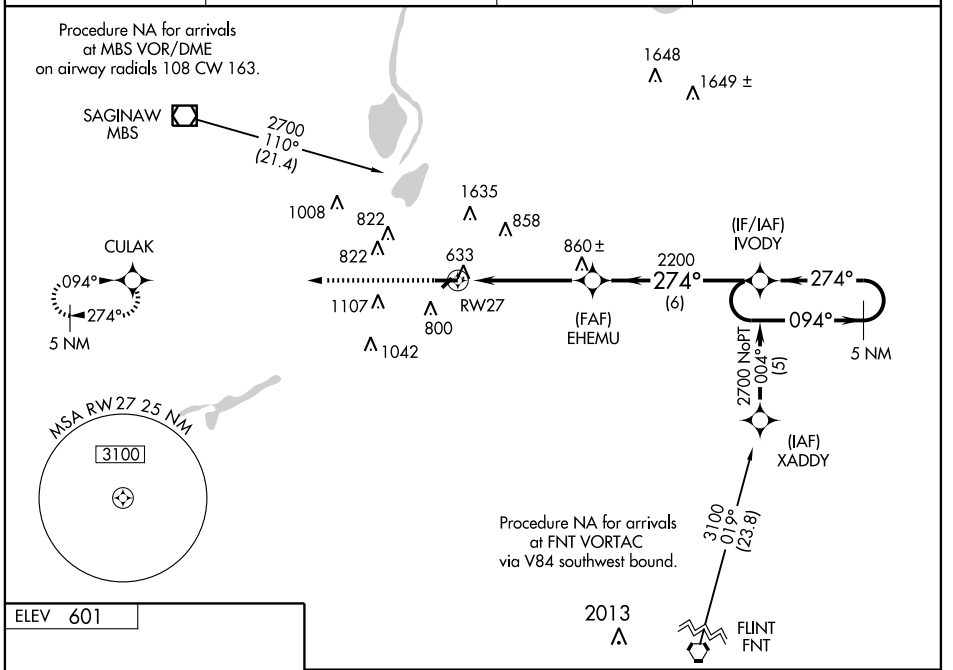

ELEV 601



REIL Rwy 9 L
MIRL Rwys 5-23 and 9-27 L

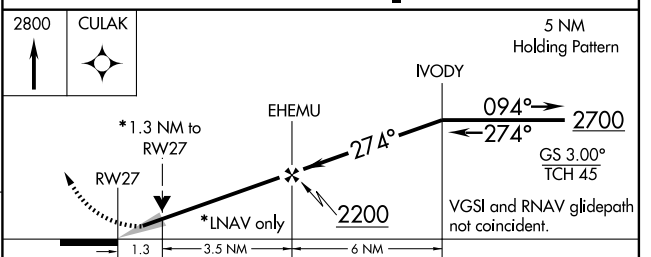

CATEGORY	A	B	C	D
LPV DA	850-½ 250 (300-½)			NA
LNAV/VNAV DA	903-½ 303 (400-½)			NA
LNAV MDA	1040-½ 440 (500-½)		1040-¾ 440 (500-¾)	NA
CIRCLING	1100-1 499 (500-1)		1100-1½ 499 (500-1½)	NA

EC-1, 22 OCT 2009 to 19 NOV 2009

EC-1, 22 OCT 2009 to 19 NOV 2009