RNAV (GPS) RWY 33

ALBION MUNI (BVN)

WAAS	APP CRS	Rwy Idg	3700
CH 93913	328°	TDZE	1803
W33A		Apt Elev	1806

Baro-VNAV NA when using Norfolk altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Norfolk altimeter setting and increase all DA 106 feet, all MDA 120 feet, increase LPV all Cats visibility ¼ mile, LNAV/VNAV all Cats visibility ½ mile, LNAV Cat B and Circling Cat B visibility ¼ mile. VDP NA when using Norfolk altimeter setting.

MISSED APPROACH: Climb to 4300 direct AMTAH and hold.

AWOS-3	MINNEAPOLIS CENTER	CTAF
118.575	128.0 385.5	122.9 L

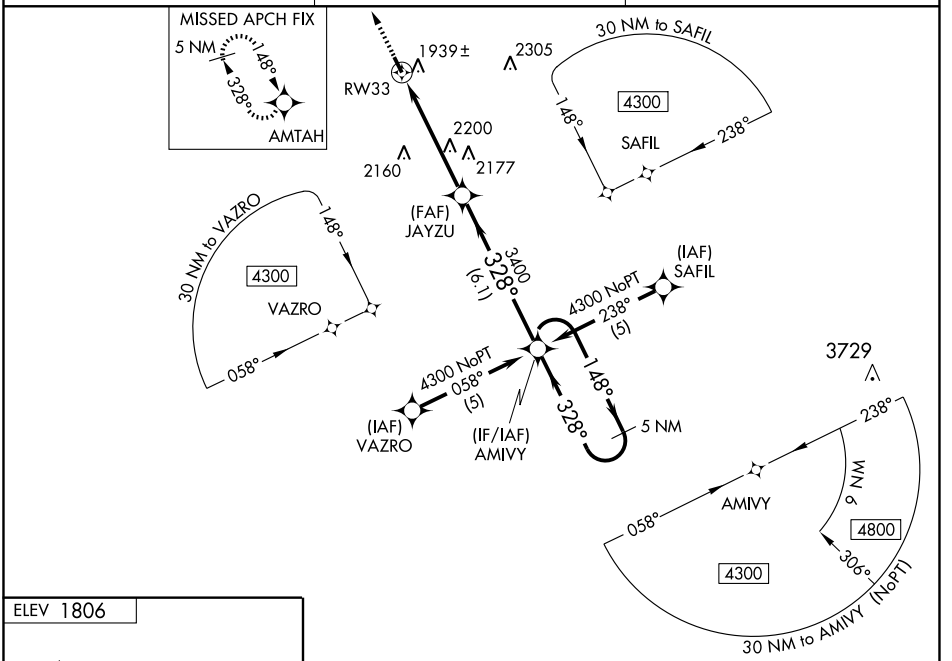

NC-2, 22 OCT 2009 to 19 NOV 2009

NC-2, 22 OCT 2009 to 19 NOV 2009

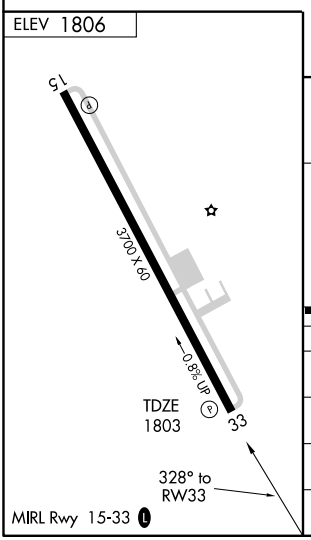

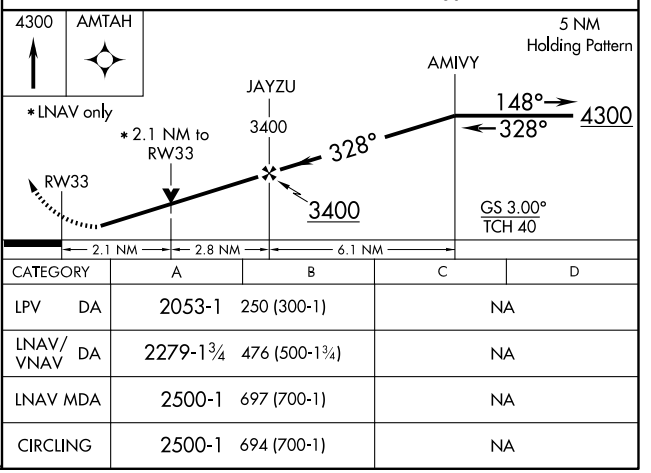

CATEGORY		A	B	C	D
LPV	DA	2053-1	250 (300-1)	NA	
LNAV/VNAV	DA	2279-1¾	476 (500-1¾)	NA	
LNAV MDA		2500-1	697 (700-1)	NA	
CIRCLING		2500-1	694 (700-1)	NA	