

WAAS CH 78115 W18A	APP CRS 185°	Rwy Idg TDZE Apt Elev	5000 454 458
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 18

PHILADELPHIA MUNI (MPE)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
▲ When local altimeter setting not received, use Key Field altimeter setting and increase all DA 101 feet and all MDA 120 feet and increase LPV all Cats, LNAV Cat C and Circling Cats C and D visibility ¼ mile, increase LNAV/VNAV all Cats, LNAV Cat D visibility ½ mile. Baro-VNAV and VDP NA when using Key Field altimeter setting.



MISSED APPROACH:
Climb to 3000 direct OKDAE and hold.

ASOS 118.725	MEMPHIS CENTER 132.75 263.0	UNICOM 123.0 (CTAF) 0
------------------------	---------------------------------------	---------------------------------

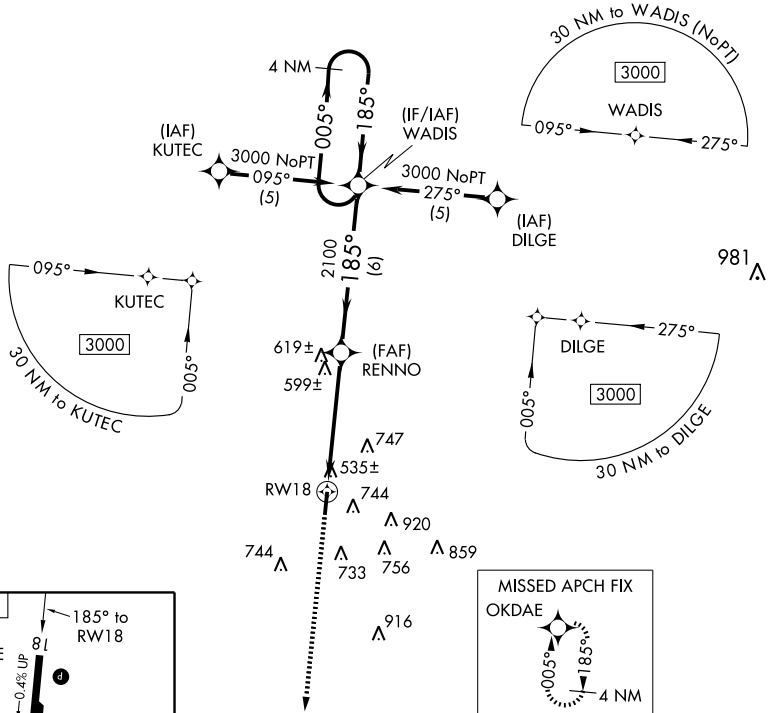

SC-4, 22 OCT 2009 to 19 NOV 2009

SC-4, 22 OCT 2009 to 19 NOV 2009

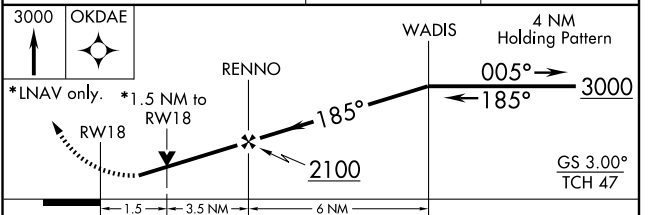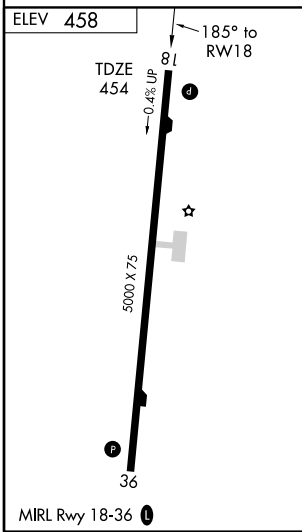

CATEGORY	A	B	C	D
LPV DA		774-1¼	320 (400-1¼)	
LNAV/VNAV DA		850-1½		396 (400-1½)
LNAV MDA	960-1	506 (600-1)		960-1½ 506 (600-1½)
CIRCLING	1060-1 602 (700-1)		1060-1¾ 602 (700-1¾) 1060-2 602 (700-2)	