WAAS	APP CRS	Rwy Idg	5000
CH 48915	005°	TDZE	458
W36A		Apt Elev	458

RNAV (GPS) RWY 36

PHILADELPHIA MUNI (MPE)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Key Field altimeter setting and increase all DA 101 feet and all MDA 120 feet and increase LPV, LNAV/VNAV all Cats, LNAV Cats C and D visibility ½ mile, increase Circling Cats C and D visibility ¼ mile. Baro-VNAV and VDP NA when using Key Field altimeter setting.

MISSED APPROACH: Climb to 3000 direct WADIS and hold.

ASOS	MEMPHIS CENTER	UNICOM
118.725	132.75 263.0	123.0 (CTAF) L

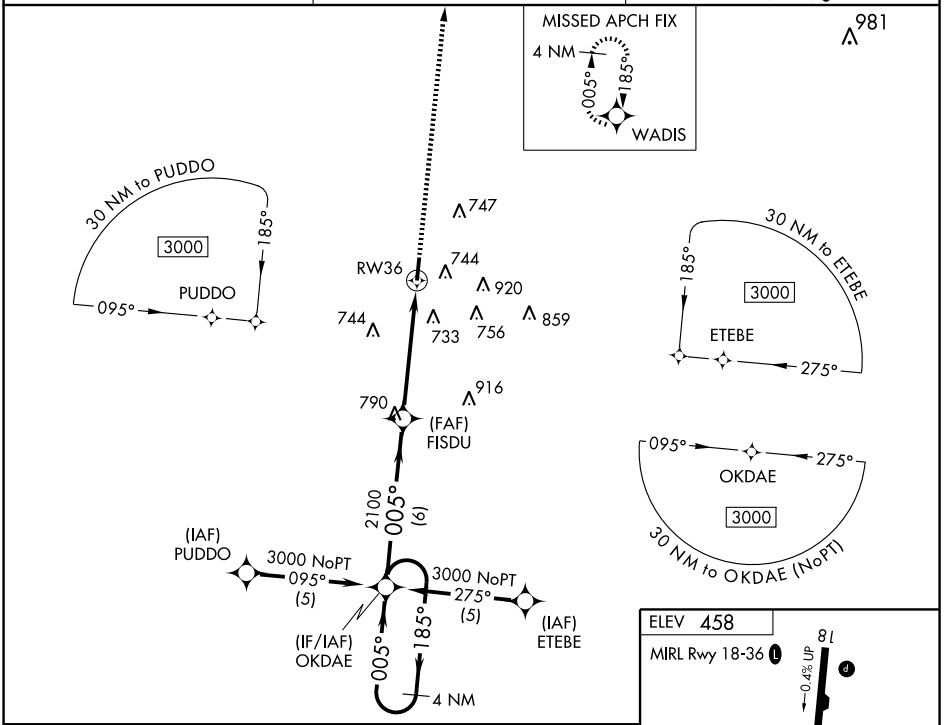

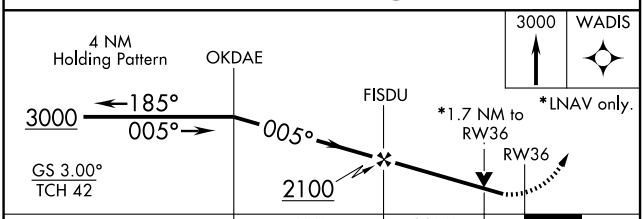

CATEGORY	A	B	C	D
LPV DA	838-1¼ 380 (400-1¼)			
LNAV/VNAV DA	1107-2¼ 649 (700-2¼)			
LNAV MDA	1040-1 582 (600-1)		1040-1½ 582 (600-1½)	1040-1¾ 582 (600-1¾)
CIRCLING	1060-1 602 (700-1)		1060-1¾ 602 (700-1¾)	1060-2 602 (700-2)

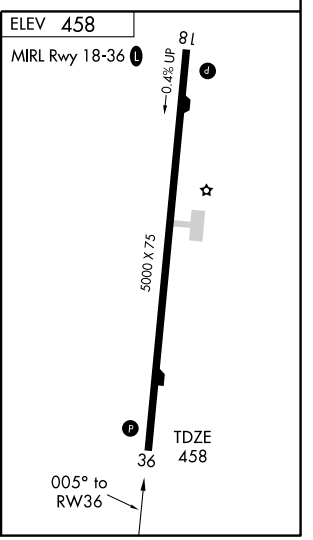

SC-4, 22 OCT 2009 to 19 NOV 2009
SC-4, 22 OCT 2009 to 19 NOV 2009