WAAS CH 86708 W06A	APP CRS 060°	Rwy Idg 5000 TDZE 657 Apt Elev 666

RNAV (GPS) RWY 6
PONTIAC MUNI (PNT)

DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Bloomington/Normal altimeter setting and increase LPV DA to 1138, LNAV/VNAV DA to 1339 and all MDA 100 feet, increase LPV visibility ¼ mile all Cats, LNAV/VNAV 1 mile all Cats, LNAV and Circling Cat C ¼ mile. Baro-VNAV and VDP NA when using Bloomington/Normal altimeter setting. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 3000 direct KEJDO and hold.

AWOS-3	CHICAGO CENTER	UNICOM
119.675	124.55 398.9	122.8 (CTAF) L

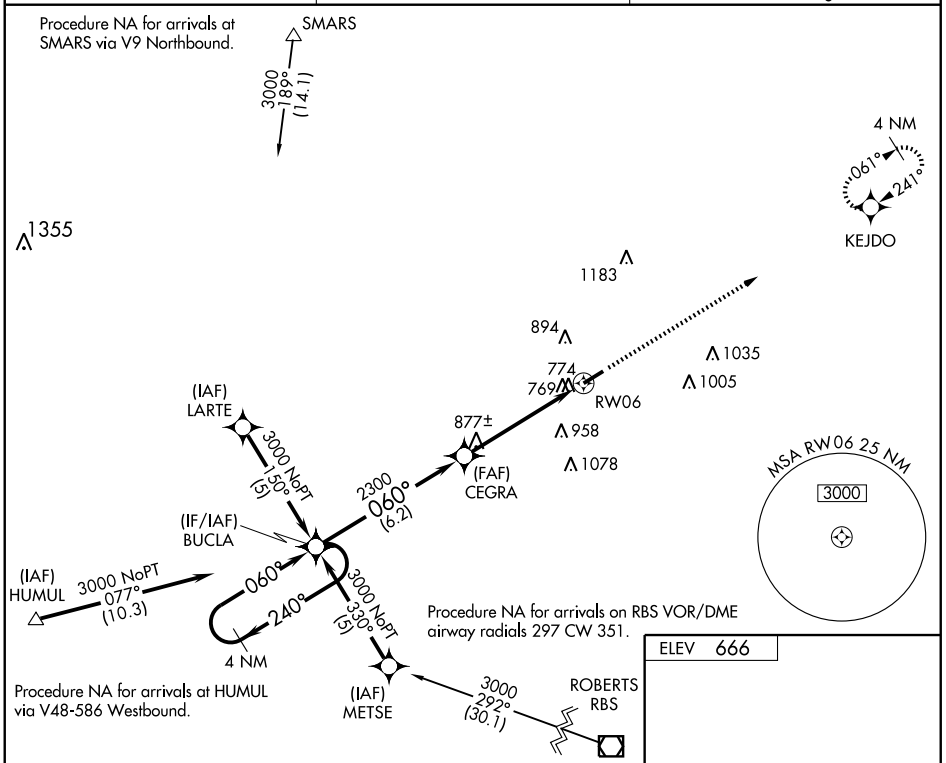

ELEV 666

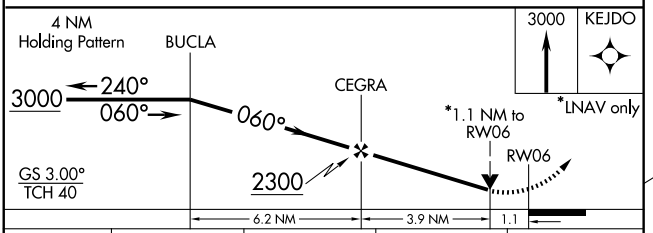



CATEGORY	A	B	C	D
LPV DA	1040-1½ 383 (400-1½)			NA
LNAV/VNAV DA	1071-1½ 414 (500-1½)			NA
LNAV MDA	1040-1 383 (400-1)			NA
CIRCLING	1180-1 514 (600-1)		1200-1½ 534 (600-1½)	NA

MIRL Rwy 6-24 L

EC-3, 22 OCT 2009 to 19 NOV 2009
EC-3, 22 OCT 2009 to 19 NOV 2009