WAAS CH 78299 W34A	APP CRS 336°	Rwy Idg 8800 TDZE 1273 Apt Elev 1287

RNAV (GPS) RWY 34

FAYETTEVILLE/ NORTHWEST ARKANSAS RGNL (XNA)

DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (115°F). For inoperative MALSR, increase LPV all Cats visibility to RVR 4000 and LNAV Cat D to RVR 6000. If local altimeter setting not received, use Smith Field altimeter setting and increase all DAs/MDAs 40 feet. VDP and Baro-VNAV NA when using Smith Field altimeter setting.

MALSR

MISSED APPROACH: Climb to 3400 direct HUNTO and hold

ASOS	RAZORBACK APP CON ★	NORTHWEST ARKANSAS RGNL TOWER ★	GND CON
119.425	121.0 244.57	127.1 (CTAF) L	121.9

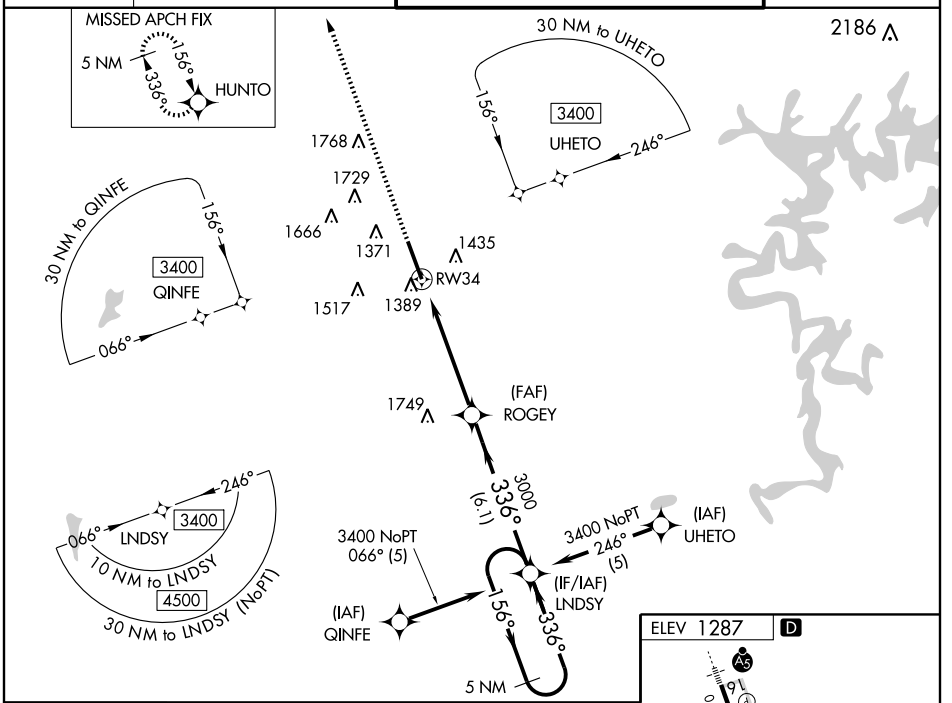

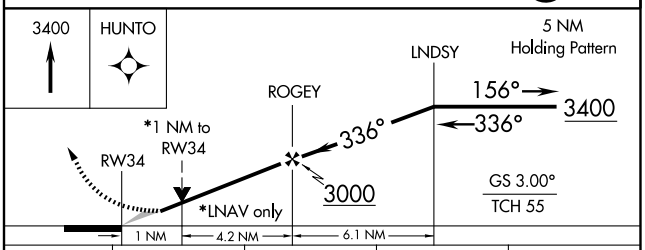

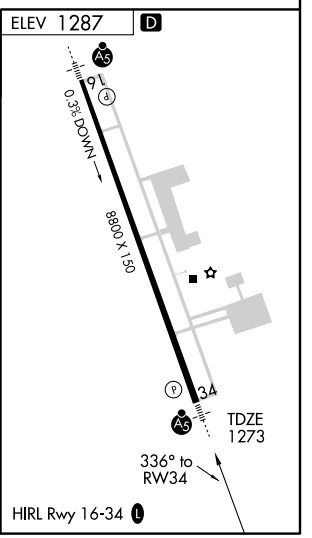

CATEGORY	A	B	C	D
LPV DA	1523/24 250 (300-½)			
LNAV/VNAV DA	1639/40 366 (400-¾)			
LNAV MDA	1640/24 367 (400-½)			1640/50 367 (400-1)
CIRCLING	1720-1¼ 433 (500-1¼)	1740-1¼ 453 (500-1¼)	1740-1½ 453 (500-1½)	1840-2 553 (600-2)

SC-1, 22 OCT 2009 to 19 NOV 2009
SC-1, 22 OCT 2009 to 19 NOV 2009