WAAS	APP CRS	Rwy Idg	5000
CH 42909	359°	TDZE	54
W36A		Apt Elev	55

RNAV (GPS) RWY 36

PICAYUNE MUNI (MJD)

Baro-VNAV NA when using Stennis Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received use Stennis Intl altimeter setting and increase all DA/MDA 40 feet. Increase LNAV/VNAV visibility ¼ mile all Cats and LNAV Cat D ½ mile.

MISSED APPROACH: Climb to 1800 direct ASAGE and via 082° track to CAESA and hold.

AWOS-3	GULFPORT APP CON	UNICOM
119.075	124.6 354.1	122.8 (CTAF) L

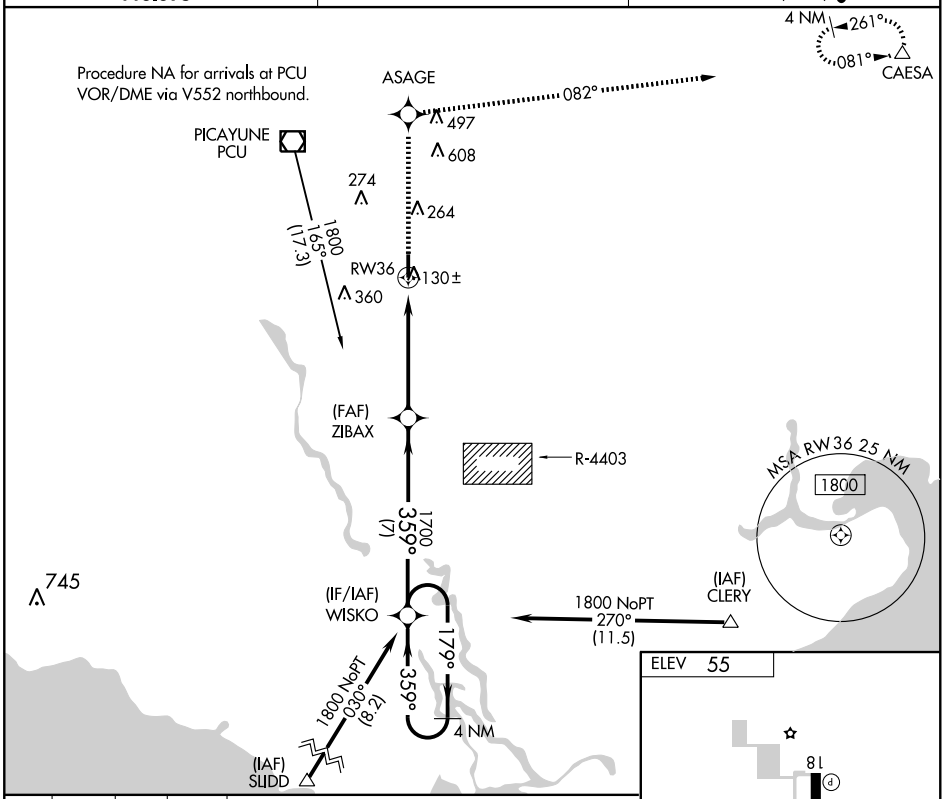

CATEGORY	A	B	C	D
LPV DA		304-1	250 (300-1)	
LNAV/VNAV DA		400-1¼	346 (400-1¼)	
LNAV MDA		380-1	326 (400-1)	
CIRCLING	460-1 405 (500-1)	580-1 525 (600-1)	580-1½ 525 (600-1½)	640-2 585 (600-2)

SC-4, 22 OCT 2009 to 19 NOV 2009
SC-4, 22 OCT 2009 to 19 NOV 2009