

RNAV (GPS) RWY 7

BELLEFONTAINE RGNL (E.D.J)


APP CRS 074°	Rwy Idg 4999
	TDZE 1113
	Apt Elev 1123

▽ Obtain local altimeter on CTAF; when not received use James M. Cox Dayton Intl altimeter setting. VDP NA with James M. Cox Dayton Intl altimeter setting. GPS or RNP-0.3 required. DME/DME RNP-0.3 NA.


△ NA

MISSED APPROACH: Climbing left turn to 3000 direct BUTYN WP and hold.

AWOS-3 118.075	DAYTON APP CON 118.425 294.5	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

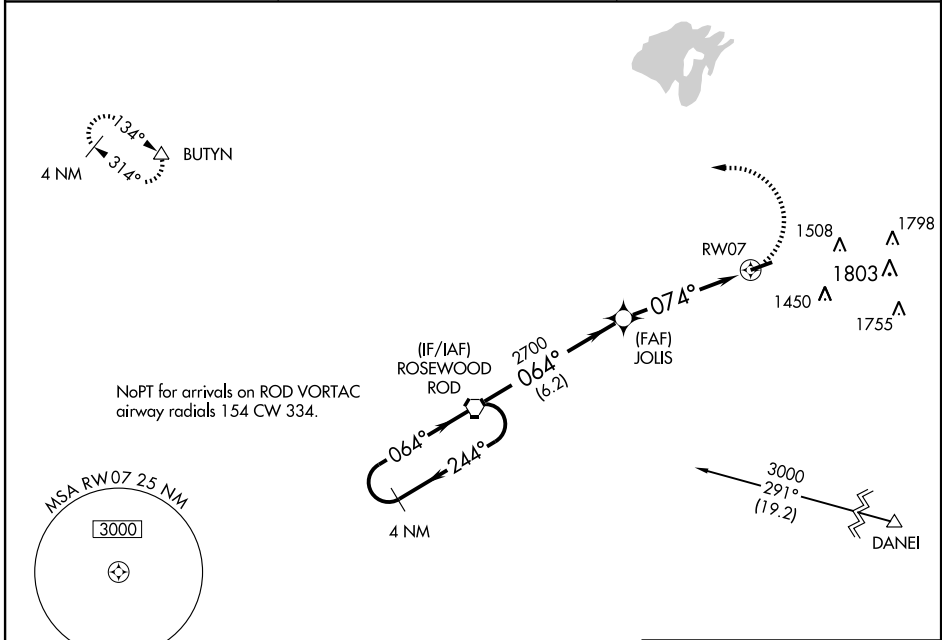

ELEV	1123
------	------

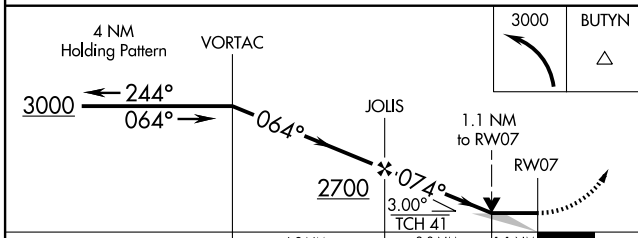

CATEGORY	A	B	C	D
RNAV MDA	1480-1 367 (400-1)			1480-1¼ 367 (400-1¼)
CIRCLING	1540-1 417 (500-1)	1640-1 517 (600-1)	1640-1½ 517 (600-1½)	1720-2 597 (600-2)
JAMES M. COX DAYTON INTL. ALTIMETER SETTING MINIMUMS				
RNAV MDA	1580-1 467 (500-1)	1580-1¼ 467 (500-1¼)	1580-1½ 467 (500-1½)	1580-1¾ 467 (500-1¾)
CIRCLING	1640-1 517 (600-1)	1740-1 617 (700-1)	1740-1¾ 617 (700-1¾)	1820-2¼ 697 (700-2¼)

