ILS or LOC RWY 22R

LITTLE ROCK/ ADAMS FIELD (LIT)

LOC/DME I-AAY	APP CRS	Rwy Idg	8273
110.3	225°	TDZE	262
Chan 40		Apt Elev	262

VDP NA when using Stuttgart altimeter setting. When local altimeter setting not received, use Stuttgart altimeter setting and increase all DA 82 feet, all MDA 100 feet. Increase S-ILS visibility to RVR 4000, increase S-LOC 22R Cat C visibility to RVR 5000, Cat D visibility to RVR 6000 and circling Cat C visibility to 2 miles.

ASR

ALSF-2

MISSED APPROACH: Climb to 1000 then climbing right turn to 2300 via LIT VORTAC R-250 to BEGAN Int/LIT 22 DME and hold.

ATIS	LITTLE ROCK APP CON	ADAMS TOWER	GND CON	CLNC DEL
125.65	135.4 291.775 353.6	118.7 257.8	121.9 339.8	118.95

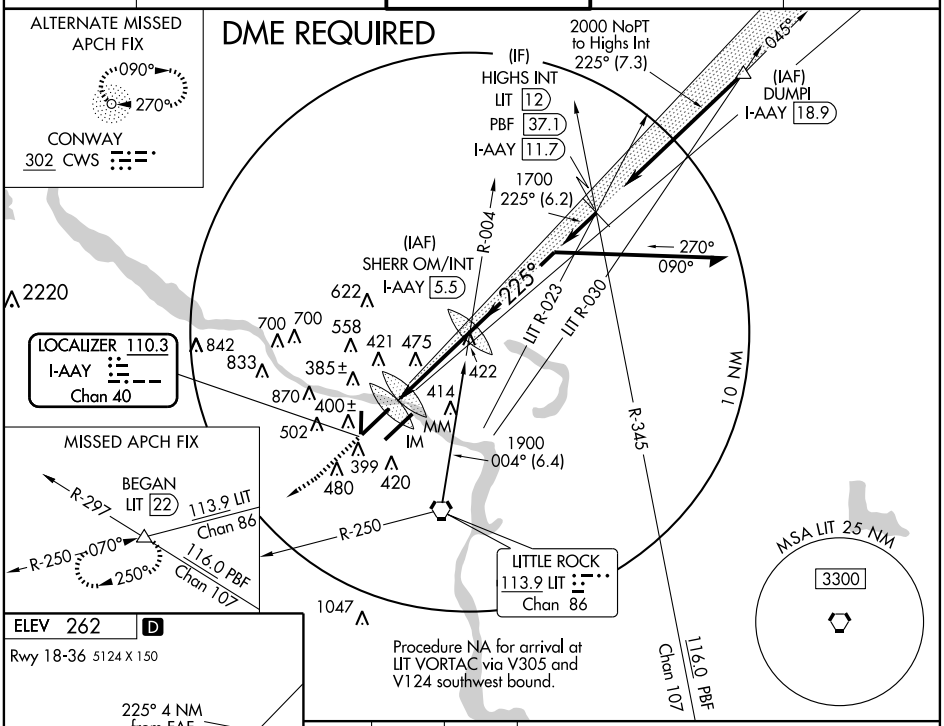

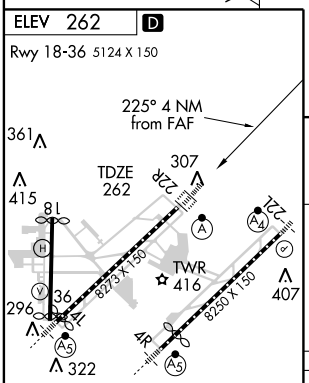

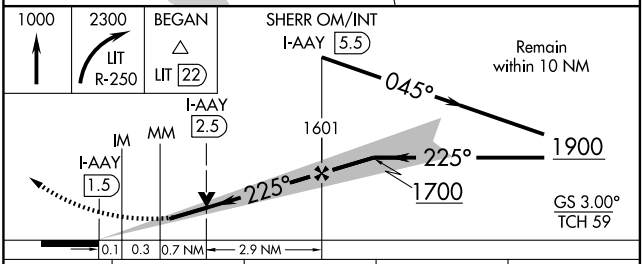

TDZ/CL Rwy 22R
HIRL Rwys 4R-22L, 4L-22R and 18-36

FAF to MAP 4 NM

Knots	60	90	120	150	180
Min:Sec	4:00	2:40	2:00	1:36	1:20

CATEGORY	A	B	C	D
S-ILS 22R	462/18 200 (200-½)			
S-LOC 22R	680/24 418 (500-½)		680/40 418 (500-¾)	
CIRCLING	800-1 538 (600-1)		880-1¾ 618 (700-1¾)	1180-3 918 (1000-3)

SC-1, 22 OCT 2009 to 19 NOV 2009
SC-1, 22 OCT 2009 to 19 NOV 2009