WAAS	APP CRS	Rwy ldg 5000
CH 60921	225°	TDZE 50
W22A		Apt Elev 50

RNAV (GPS) RWY 22

GEORGETOWN / SUSSEX COUNTY (GED)

DME/DME RNP-0.3 NA. Baro-VNAV NA below -15°C (56°F). If local altimeter setting not received, use Salisbury-Ocean City Wicomico Rgnl altimeter setting and increase all DAs/MDAs 60 feet. Baro-VNAV NA when using Salisbury-Ocean City Wicomico Rgnl altimeter setting.

MISSED APPROACH: Climb to 2000 direct WATNI and via 327° track to YOPUG and hold.

ASOS	DOVER APP CON	CLNC DEL	UNICOM
118.375	132.425 257.875	125.55	123.0 (CTAF) L

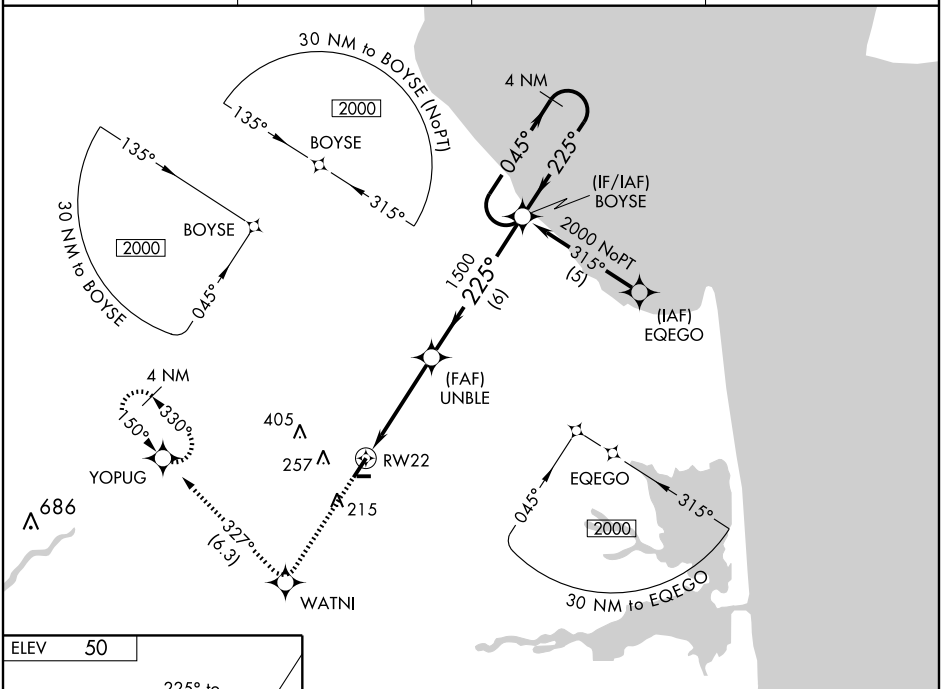

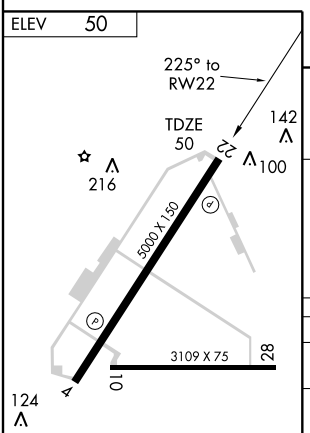

REIL Rwys 4, 22, 10 and 28 L
MIRL Rwys 4-22 and 10-28 L

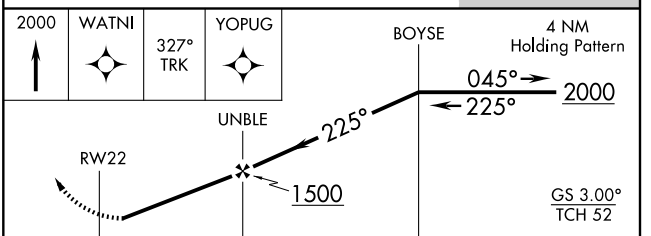

CATEGORY	A	B	C	D
LPV DA	360-1 310 (400-1)			
LNAV/VNAV DA	400-1¼ 350 (400-1¼)			
LNAV MDA	480-1 430 (500-1)		480-1¼ 430 (500-1¼)	480-1½ 430 (500-1½)
CIRCLING	560-1¼ 510 (600-1¼)		600-1½ 550 (600-1½)	600-2 550 (600-2)

NE-3, 22 OCT 2009 to 19 NOV 2009
NE-3, 22 OCT 2009 to 19 NOV 2009