


WAAS CH 45912 W18A	APP CRS 180°	Rwy Idg TDZE Apt Elev	5905 734 734
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 18

MOUNT STERLING MUNI (I63)



V Baro-VNAV NA. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Use Quincy altimeter setting; when not received, use Pittsfield altimeter setting and increase all DA 5 feet, increase all MDA 20 feet and LNAV Cat D visibility ¼ mile.
NA MISSED APPROACH: Climb to 2700 direct BEWOH and hold.

QUINCY ASOS 121.425	KANSAS CITY CENTER 135.525 319.9	UNICOM 122.8 (CTAF) 0
-------------------------------	--	--

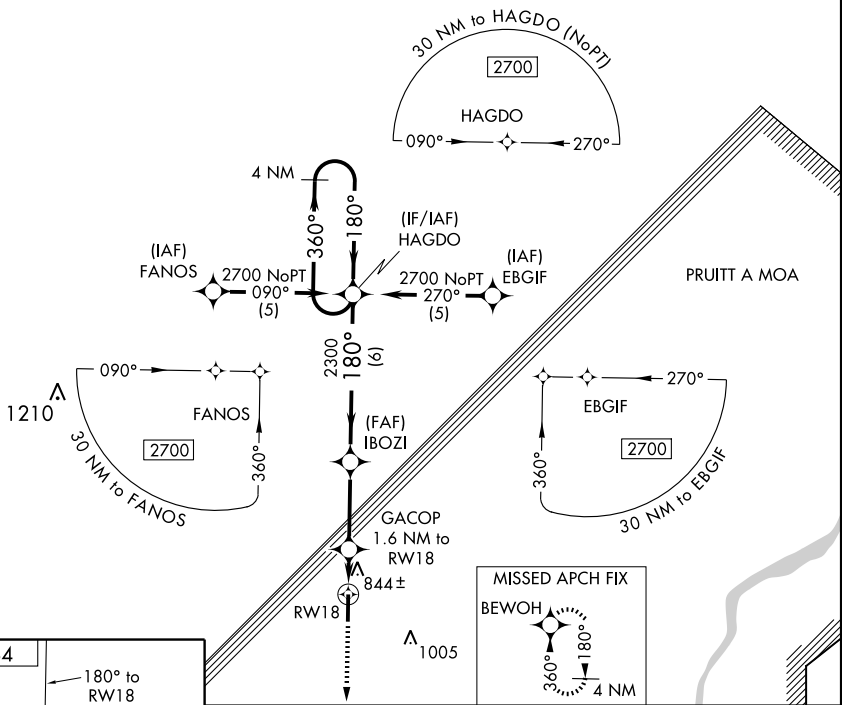

EC-3, 22 OCT 2009 to 19 NOV 2009

EC-3, 22 OCT 2009 to 19 NOV 2009

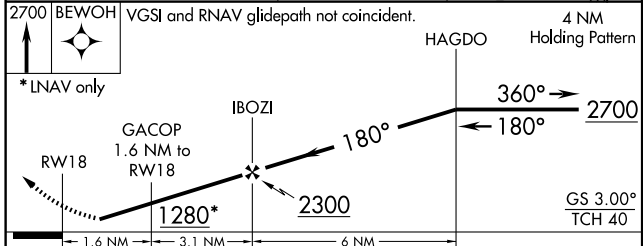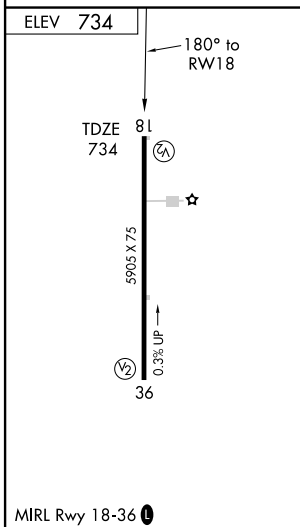

CATEGORY	A	B	C	D
LPV DA		1066-1¼	332 (400-1¼)	
LNAV/VNAV DA		1191-1¾	457 (500-1¾)	
LNAV MDA	1160-1	426 (500-1)	1160-1¼	426 (500-1¼)
CIRCLING	1200-1	466 (500-1)	1200-1½ 466 (500-1½)	1300-2 566 (600-2)