VORTAC CMI	APP CRS	Rwy Idg	6501
110.0	052°	TDZE	751
Chan 37		Apt Elev	755

VOR RWY 4

CHAMPAIGN-URBANA/ UNIVERSITY OF ILLINOIS-WILLARD (CMI)

ASR

When local altimeter setting not received, use Rantoul altimeter setting and increase all MDA 60 feet, increase S-4 Cat. C/D visibility ¼ mile.

MISSED APPROACH: Climb to 2000 then climbing right turn to 2700 via CMI VORTAC R-062 to OCTOE Int/CMI 12.2 DME and hold.

ATIS	CHAMPAIGN APP CON ★	CHAMPAIGN TOWER ★	GND CON	CLNC DEL	UNICOM
124.85	121.35 285.65 (316°-135°) 132.85 291.0 (136°-315°)	120.4 (CTAF) L 229.4	121.8	128.75	122.95

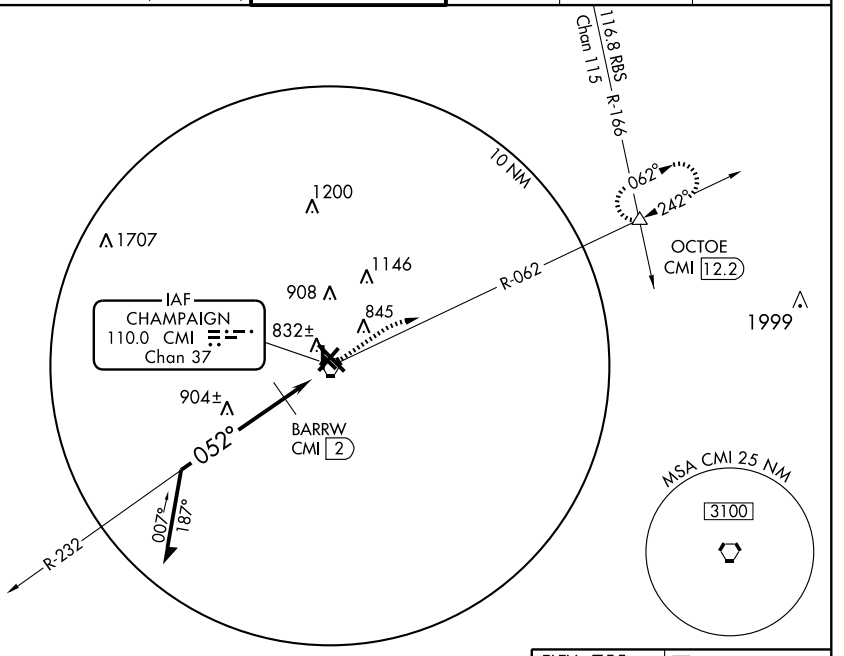

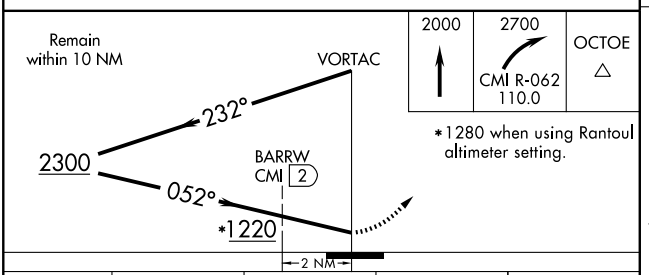

2000	2700	OCTOE
	CMI R-062 110.0	△

*1280 when using Rantoul altimeter setting.

ELEV 755 D



CATEGORY	A	B	C	D
S-4	1220-1 469 (500-1)		1220-1¼ 469 (500-1¼)	1220-1½ 469 (500-1½)
CIRCLING	1220-1 465 (500-1)		1220-1½ 465 (500-1½)	1320-2 565 (600-2)
BARRW FIX MINIMUMS				
S-4	1140-1 389 (400-1)			1140-1¼ 389 (400-1¼)
CIRCLING	1160-1 405 (500-1)	1220-1 465 (500-1)	1220-1½ 465 (500-1½)	1320-2 565 (600-2)

HIRL Rwy 14L-32R L
MIRL Rwy 4-22 L
MIRL Rwys 14R-32L and 18-36

EC-3, 22 OCT 2009 to 19 NOV 2009
EC-3, 22 OCT 2009 to 19 NOV 2009