WAAS CH 50310 W01A	APP CRS 007°	Rwy Idg 9001 TDZE 685 Apt Elev 689

RNAV (GPS) RWY 1
ALPENA COUNTY RGNL (APN)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Roger City altimeter setting and increase all DA 55 feet and all MDA 60 feet and increase LNAV/VNAV all Cats and LNAV Cats C and D visibility ¼ mile. Baro-VNAV and VDP NA when using Roger City altimeter setting.

MALSR

MISSED APPROACH: Climb to 3500 direct HIMVO and via 307° track to RABBO and hold.

ASOS	ALPENA APP CON ★	ALPENA TOWER ★	GND CON	UNICOM
120.675	128.425 379.3	121.35 (CTAF) L 318.1	121.9 275.8	122.95

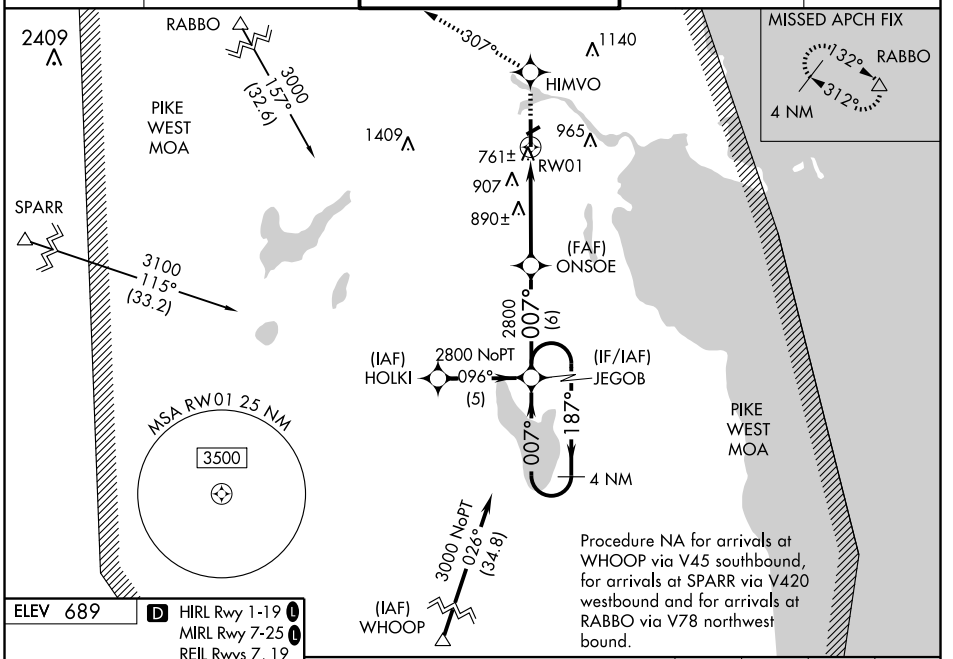

ELEV 689

D HIRL Rwy 1-19 L
MIRL Rwy 7-25 L
REIL Rwys 7, 19 and 25 L

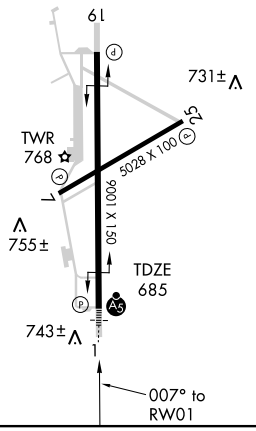

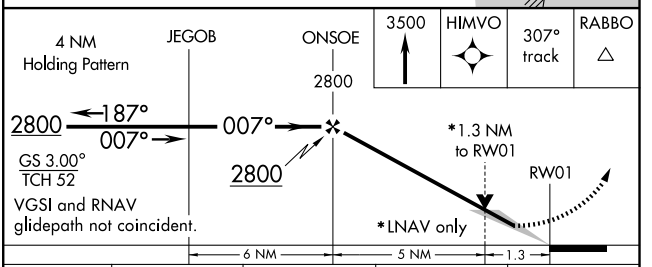

CATEGORY	A	B	C	D
LPV DA	885-½ 200 (200-½)			
LNAV/VNAV DA	1029-¾ 344 (400-¾)			
LNAV MDA	1160-½ 475 (500-½)		1160-¾ 475 (500-¾)	1160-1 475 (500-1)
CIRCLING	1160-1 471 (500-1)		1160-1½ 471 (500-1½)	1260-2 571 (600-2)

EC-1, 22 OCT 2009 to 19 NOV 2009
EC-1, 22 OCT 2009 to 19 NOV 2009