

ILS RWY 3



LANAI CITY/LANAI (LNY)(PHNY)

LOC/DME I-LNY 111.1 Chan 48	APP CRS 033°	Rwy Idg 5001 TDZE 1305 Apt Elev 1308
---	------------------------	---



When local altimeter setting not received, procedure not authorized, except for operators with approved weather reporting service.
 Glide slope unusable for coupled approaches below 1505 MSL.
 Glide slope unusable beyond 5 degrees left of course.

MISSED APPROACH: Climb to 1700 then climbing left turn to 3000 via LNY R-278 to GRAMY Int/LNY 10 DME and hold.

ASOS 118.375	HCF APPROACH 119.3 307.1	CTAF 122.9
------------------------	------------------------------------	----------------------

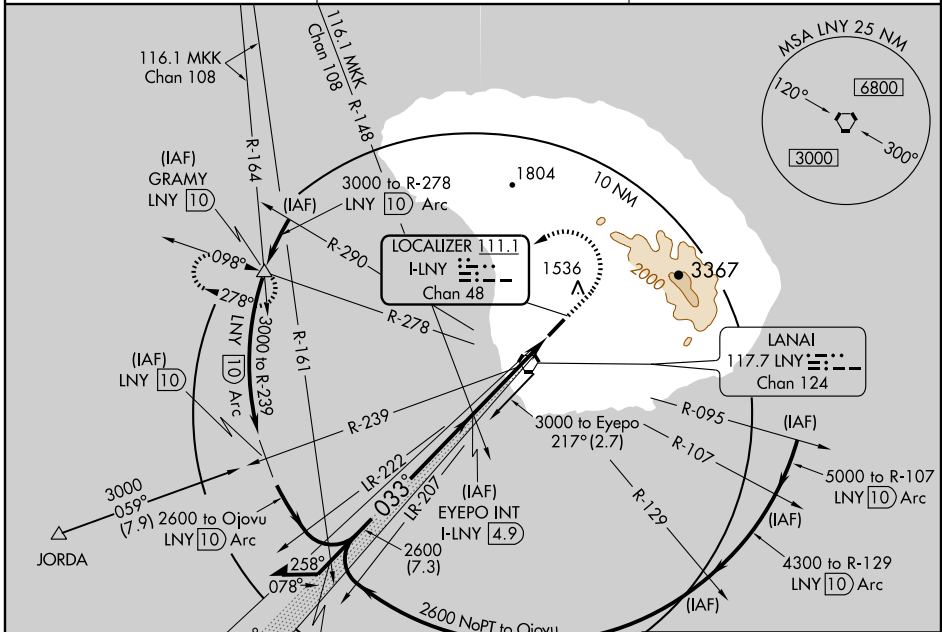

ELEV 1308

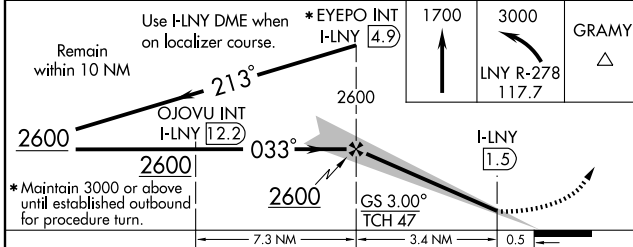

CATEGORY	A	B	C	D
S-ILS 3		1505-¾	200 (200-¾)	
S-LOC 3		1580-1	275 (300-1)	
CIRCLING	1840-1 532 (600-1)	1880-1 572 (600-1)	1900-1½ 592 (600-1½)	1900-2 592 (600-2)

MIRL Rwy 3-21					
FAF to MAP 3.4 NM					
Knots	60	90	120	150	180
Min:Sec	3:24	2:16	1:42	1:21	1:08

PAC, 22 OCT 2009 to 17 DEC 2009

PAC, 22 OCT 2009 to 17 DEC 2009