

RNAV (GPS) RWY 13

OTTUMWA RGNL (OTM)




WAAS CH 86300 W13A	APP CRS 132°	Rwy Idg TDZE 844 Apt Elev 845	5885
--	------------------------	---	-------------

⚠ DME/DME RNP-0.3 NA. Circling to Rwy 4 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (117°F). When local altimeter setting not received, use Oskaloosa altimeter setting and increase all DA/MDA 20 feet. Baro-VNAV NA when using Oskaloosa altimeter setting. Inoperative table does not apply to LPV.

ODALS

MISSED APPROACH: Climb to 2800 direct HEVPI and via 125° track to OTM VOR/DME and hold.

ASOS 124.175	CHICAGO CENTER 118.15 354.1	UNICOM 123.0 (CTAF)
------------------------	---------------------------------------	-------------------------------

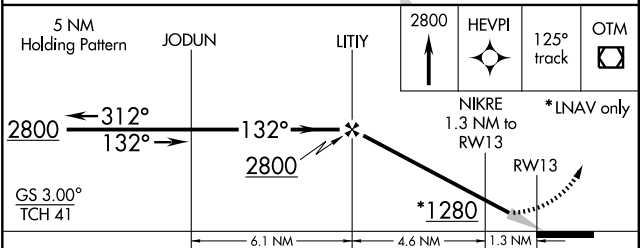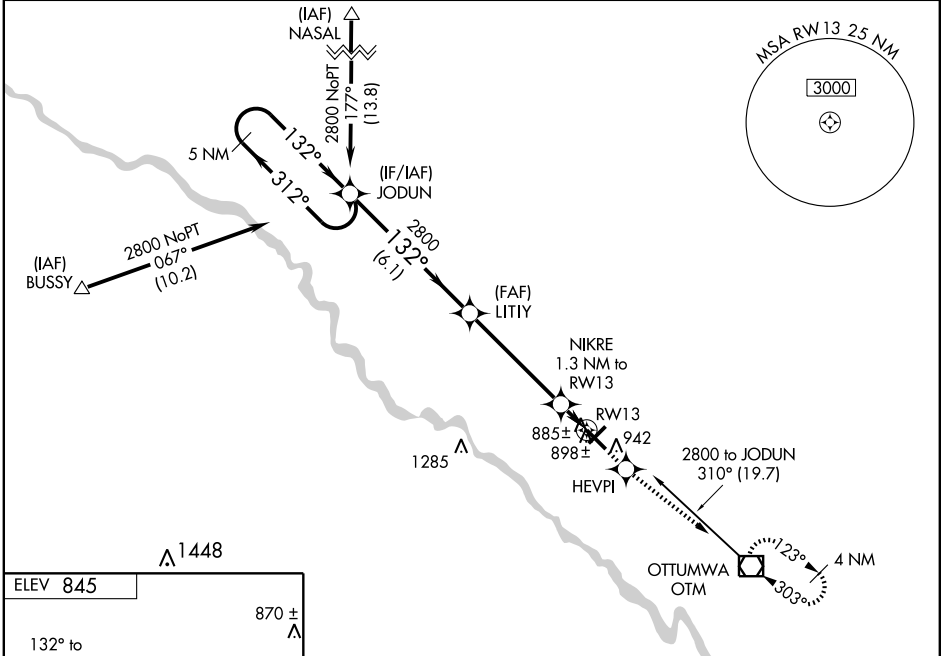

CATEGORY	A	B	C	D
LPV DA		1094-1 250 (300-1)		NA
LNAV/VNAV DA	1135- ³ / ₄	291 (300- ³ / ₄)		NA
LNAV MDA	1160- ³ / ₄	316 (400- ³ / ₄)		NA
CIRCLING	1260-1 415 (500-1)	1300-1 455 (500-1)	1300-1 ¹ / ₂ 455 (500-1 ¹ / ₂)	NA

REIL Rwy 13 **Ⓛ**
MIRL Rwy 4-22 **Ⓛ**
HIRL Rwy 13-31 **Ⓛ**

NC-3, 22 OCT 2009 to 19 NOV 2009

NC-3, 22 OCT 2009 to 19 NOV 2009