LOC I-FQJ	APP CRS	Rwy Idg	5505
111.1	310°	TDZE	1162
		Apt Elev	1162

ILS or LOC RWY 31
FAIRMONT MUNI (FRM)

T ADF required.
A NA Autopilot coupled approach NA below 1468 feet MSL.
S-ILS-31: Inoperative table does not apply.
S-LOC-31: For inoperative MALSR increase Cats A, B, and C visibility to 1, Cat D visibility to 1¼ .

MALSR A5

MISSED APPROACH: Climb to 2500 then climbing right turn to 3100 direct MONTZ LOM/ FRM 6.3 DME and hold.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
110.2	127.75 257.7	122.8 (CTAF) L

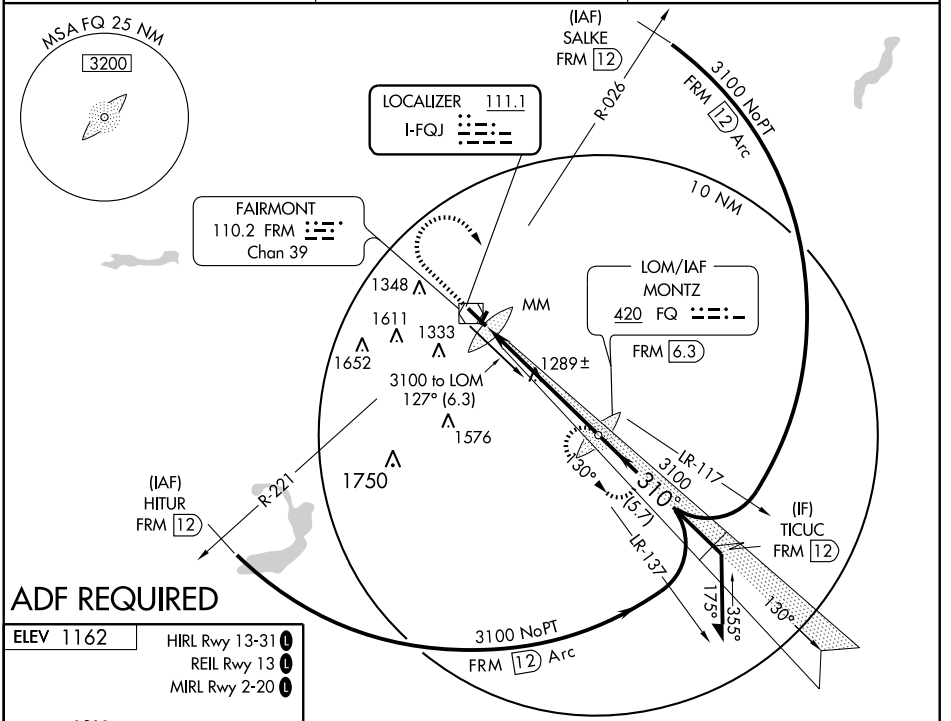

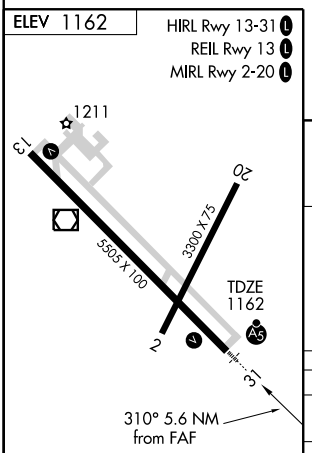

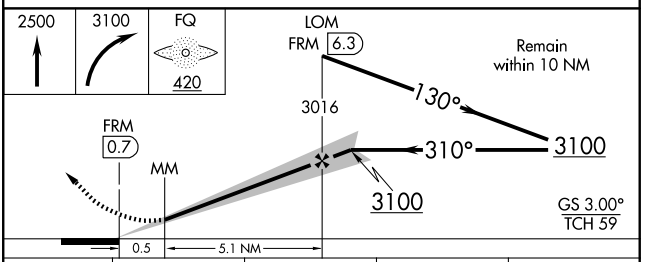

FAF to MAP 5.6 NM					
Knots	60	90	120	150	180
Min:Sec	5:36	3:44	2:48	2:14	1:52

CATEGORY	A	B	C	D
S-ILS 31	1412-¾ 250 (300-¾)			
S-LOC 31	1540-¾ 378 (400-¾)			
CIRCLING	1640-1 478 (500-1)		1640-1½ 478 (500-1½)	1720-2 558 (600-2)

NC-1, 22 OCT 2009 to 19 NOV 2009
NC-1, 22 OCT 2009 to 19 NOV 2009