

RNAV (GPS) RWY 7


MARATHON/THE FLORIDA KEYS MARATHON (MTH)

WAAS CH 99605 W07A	APP CRS 071°	Rwy Idg TDZE Apt Elev	5008 5 5
--	------------------------	-----------------------------	-------------------------------------

- ▼** Baro-VNAV NA when using Key West Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 49°C (120°F).
- ⚠** DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Key West Intl altimeter setting and increase all DAs 93 feet, increase all MDAs 100 feet, increase LPV and LNAV/VNAV all Cats visibility ½ mile, LNAV Cats C and D visibility ½ mile, and Circling Cat C visibility ½ mile, Circling Cat D visibility ¼ mile.

MISSED APPROACH: Climb to 2000 direct LOGEY and hold.

ASOS 135.525	MIAMI CENTER 133.5 306.9	UNICOM 122.8 (CTAF) 0
------------------------	------------------------------------	---------------------------------

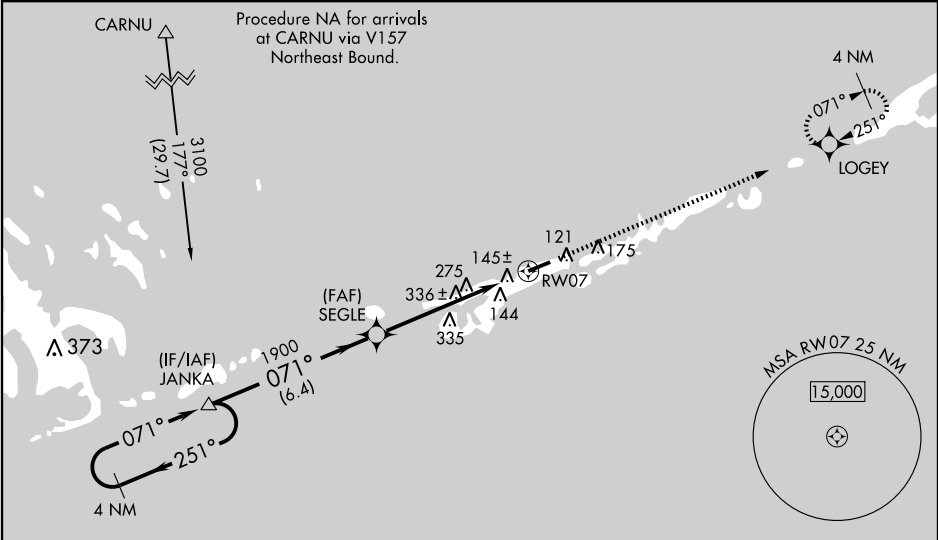

SE-3, 22 OCT 2009 to 19 NOV 2009

SE-3, 22 OCT 2009 to 19 NOV 2009

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident.		2000	LOGEY
3100 ← 251° / 071° →		1900		TDZE 5	5008 x 100
GS 3.00° TCH 40		6.4 NM		62	
JANKA		SEGLE		RW07	
6.4 NM		5.7 NM		071° to RW07	
CATEGORY	A	B	C	D	
LPV DA	389-1¼		384 (400-1¼)		
LNAV/VNAV DA	441-1½		436 (500-1½)		
LNAV MDA	600-1	595 (600-1)		600-1½	600-1¾
				595 (600-1½)	595 (600-1¾)
CIRCLING	600-1	595 (600-1)		600-1½	600-2
				595 (600-1½)	595 (600-2)

REIL Rwy 7 0
MIRL Rwy 7-25 0

RNAV (GPS) RWY 7