

# LAKEPORT TWO DEPARTURE (RNAV)


OAKLAND CENTER  
127.8 353.5  
AWOS-2  
118.35

### TAKE-OFF MINIMUMS

Rwy 10: Standard with minimum  
climb of 496' per NM to 4500.  
Rwy 28: NA- Rapidly rising terrain.

NOTE: TAKE-OFF Rwy 10: Do not exceed 175 knots until passing HEBLU.

- NOTE: 1. GPS Required.
- 2. RNAV 1.

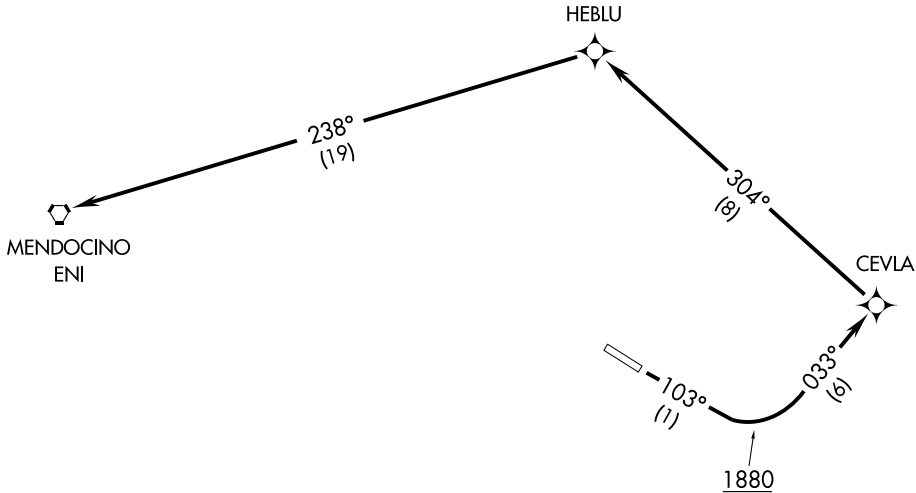

SW-2, 22 OCT 2009 to 19 NOV 2009

SW-2, 22 OCT 2009 to 19 NOV 2009

### TAKE-OFF OBSTACLE NOTES

Rwy 10: Vehicle on road 347' from DER, 7' right of centerline, 15' AGL/1394' MSL.  
Trees beginning 280' from DER, 201' left of centerline, up to 100' AGL/1479' MSL.  
Trees beginning 494' from DER, 219' right of centerline, up to 100' AGL/1479' MSL.

NOTE: Chart not to scale.



### DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 10: Climb heading 103° to 1880, then climb to 6000 on 033° course to CEVLA, then via 304° track to HEBLU, then via 238° track to ENI VORTAC, thence . . . .  
. . . . via assigned route, expect clearance to filed altitude 10 minutes after departure.