


PALMER THREE DEPARTURE (RNAV) (OBSTACLE)

ANCHORAGE DEP CON
118.6 290.5
PALMER RADIO
123.6 (CTAF) 122.4

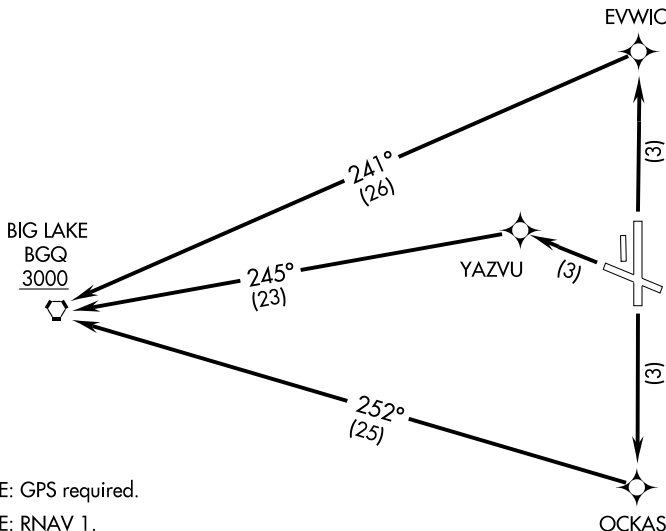

NOTE: GPS required.

NOTE: RNAV 1.

TAKE-OFF MINIMUMS

Rwy 9: NA-obstacles.

Rwy 16: Standard with minimum climb of 272 feet per NM to 1000.

Rwy 27: 500-1¼ or standard with a minimum climb of 245 feet per NM to 500.

Rwy 34: 500-1½ or standard with a minimum climb of 467 feet per NM to 800.

TAKE-OFF OBSTACLE NOTES

- Rwy 16: Trees beginning 19 feet from DER, 126 feet left of centerline, up to 60' AGL/309' MSL.
Trees beginning 17 feet from DER, 163 feet right of centerline, up to 60' AGL/280' MSL.
- Rwy 27: Trees beginning 44 feet from DER, 66 feet left of centerline, up to 60' AGL/409' MSL.
Trees beginning 19 feet from DER, 212 feet right of centerline, up to 60' AGL/519' MSL.
- Rwy 34: Trees beginning 66 feet from DER, 435 feet left of centerline, up to 60' AGL/303' MSL.
Trees and poles beginning 5239 feet from DER, 1614 feet right of centerline, up to 60' AGL/659' MSL.

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 16: Climb direct OCKAS, then right turn via 252° track to BQV VORTAC, thence. . . .

TAKE-OFF RUNWAY 27: Climb direct YAZVU, then via 245° track to BQV VORTAC, thence. . . .

TAKE-OFF RUNWAY 34: Climb direct EWWIC, then left turn via 241° track to BQV VORTAC, thence. . . .

. . . .maintain 3000 or assigned altitude, expect filed altitude 10 minutes after departure.